



HFLOR Decotile Luxury Vinyl Planks

FEATURES



Matte-luster Visuals

Featuring extra matte finish with a gloss level ranging from 1 to 3, TrueMatte delivers a refined luster that subtly captures the essence of natural wood elevating the authentic visuals of flooring.




Exceptional Durability

High-performance UV coating provides exceptional protection against daily wear and tear. With robust scratch resistance, TrueMatte ensures the long-lasting beauty of flooring.



Impenetrable Shield

TrueMatte features advanced performance in preventing staining. Its low porosity and dense structure form an impenetrable shield against stains ensuring long-term maintenance of surfaces.

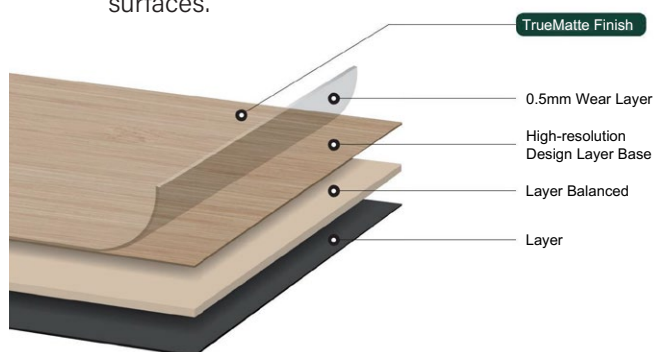

SURFACE COATING INNOVATION


TrueMatte represents a cutting-edge surface coating innovation, designed to enhance both the aesthetic and functional quality of interior spaces. With its proprietary technology, TrueMatte significantly reduces surface reflections, replicating the natural allure of real wood. Beyond its visual appeal, TrueMatte provides superior scratch resistance and robust stain protection, ensuring long-lasting durability and maintaining the beauty of floors over time.

SPECIFICATIONS

Dimensions	Plank 9"x 60" (228.6mm x1523mm)
Thickness	3.0mm
Wear Layer	20mil (0.5mm)
Finishing/Coating	TrueMatte (Enhanced Ultra-matte Urethane Coating)
Plank/Box	10 pcs
SQM/Box	3.48
SQM/Pallet	208.89
Warranty	10 Years for Light Commercial/25 Years for Residential



Natural Wood

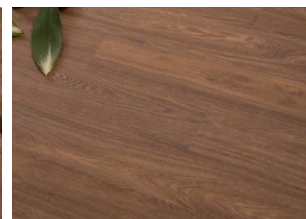

Decotile with True Matte

TrueMatte technology beautifully captures the essence and timeless appeal of natural elements, seamlessly blending them into the built environment. By offering a tactile experience through flooring materials that mirror the warmth, texture, and authenticity of wood, it creates a sense of harmony and balance. This innovation enhances the connection to nature within interior spaces, fostering a welcoming atmosphere that feels grounded, serene, and inherently natural.



There's magic in a Solomons store!












COLOURS

HFLOR Decotile Luxury Vinyl Planks offer an excellent alternative to traditional sheet vinyl flooring.





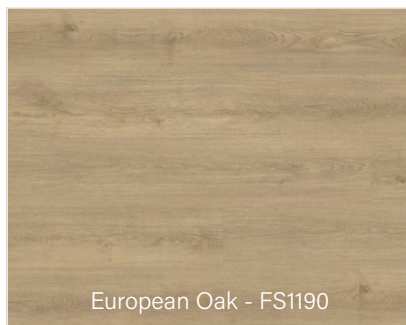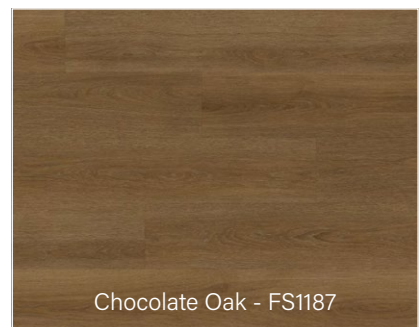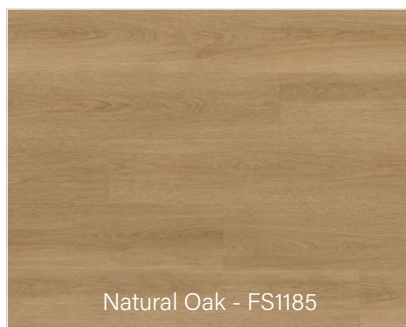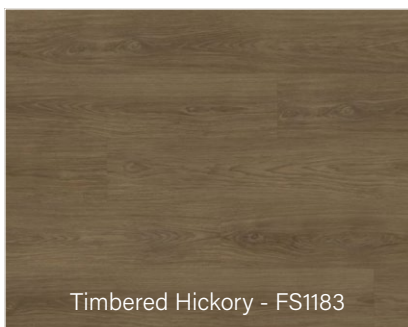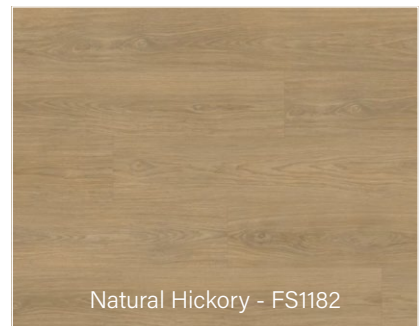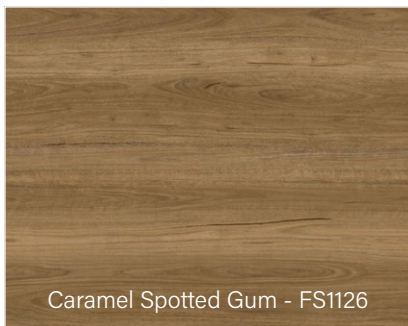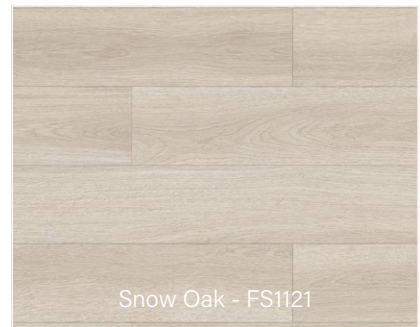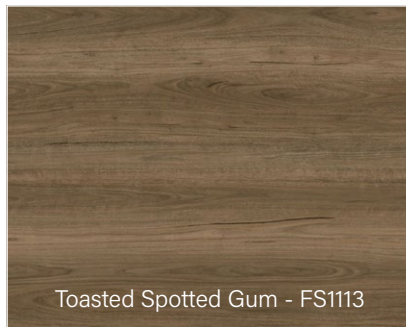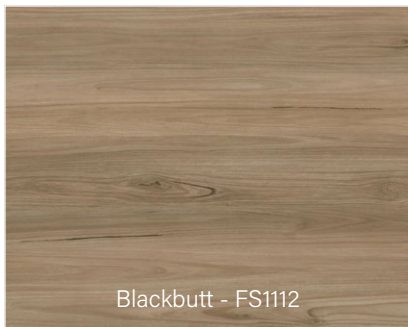

















With a range of designs from light oak to modern silver greys, these planks provide a natural timber look finish that enhances any space. Designed for both domestic and commercial use, this high quality product ensures a superior appearance.

Each of the 12 decors features an embossed texture that highlights the wood grain for a realistic look. The planks come with a micro bevel edge and are protected by a high density double PUR coating, improving resistance to scratches and stains while making maintenance easier.



TECHNICAL DATASHEET

LX Hausys DECOTILE meets the requirements of EN ISO 10582

	Characteristic	Standard	Unit	Results
	Type of Flooring	EN ISO 10582		PVC Heterogeneous Tile
	Surface Treatment			High Density PUR
	Classification	EN ISO 10582		Class 23/33/42
	Weight	EN ISO 23997	g/m ²	5,700
	Size	Possible Spec	mm	228.6 x 1523
	Squareness: Straightness	EN ISO 24342	%	≤0.25
	Overall Thickness	EN ISO 24346	mm	3
	Wear Layer Thickness	EN ISO 24340	mm	0.55
	Wear Resistance	EN 660 2		T
	Residual Indentation	EN ISO 24343 1	mm	≤0.1
	Dimensional Stability	EN ISO 23999	%	≤0.25
	Flexibility	EN ISO 24344		No Crack
	Curling after exposure to heat	EN ISO 23999	mm	≤ 1
	Light Fastness	EN ISO 105 B02		≥ 6
	Furniture Leg Resistance	EN 424		No Crack, No Damage
	Castor Chair Resistance	EN ISO 4918		No Change
	Reaction to fire	EN 13501 1		Bfl s1
	Stain Resistance	EN ISO 26987		PUR SurfaceTreatment
	Slip Resistance	DIN 51130		R9/R10 (P3)
	Dynamic Coefficient of friction	EN 13893		Class DS
	Friction(Pendulum Test)	EN 13036 4		30/36↑
	Acoustic Insulation	EN ISO 10140	dB	5
	Electrical Resistance	EN 1081	ohm	≤5.0×10 ¹¹
	Electrostatic Performance	EN 1815	kV	≤ 2
	Thermal Resistance	EN 12667	m ² .K/W	0.01
	Underfloor Heating			Suitable, Max 27°C
	Warranty In Years	EN12524		10 Commercial, 25 Residential
	Formaldehyde Group	EN 717 1		E1
	Phthalate Free			N.D
	Heavy Metal Free			N.D
	CE Marking	EN 14041:2004/ AC:200		DOP NN°20EDB DOP 36
	TVOC After 28 Days	ISO 16000 06		A+(Eurofins 392 201800200803)
	REACH	N°SVHC		SGS AYAA18 62889